





Up To 70km  
RANGE (20Ah)



45km/h  
MAX SPEED



150kg  
LOAD CAPACITY




750W  
MOTOR



| Model                   | P5-TE                              | P5-TU                              | P5-TM_ChainEU/U.S.                 | P5-TM_BeltEU/U.S.                  |
|-------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| MSRP                    | /                                  | /                                  | /                                  | /                                  |
| Frame                   | AM60B Magnesium Alloy              | AM60B Magnesium Alloy              | AM60B Magnesium Alloy              | AM60B Magnesium Alloy              |
| Battery                 | 48V 20Ah                           | 48V 20Ah                           | 48V 20Ah                           | 48V 20Ah                           |
| Motor                   | 250W                               | 500W                               | 250W/750W                          | Mid-drive 250W/750W                |
| Torque                  | 65N·m                              | 65N·m                              | 120N·m                             | 120N·m                             |
| Max speed               | 25km/h                             | 45km/h                             | 25/45km/h                          | 25/45km/h                          |
| Max range               | 70km                               | 50km                               | 70/50km                            | 70/50km                            |
| Brake                   | Hydraulic Disc Brake (4-Piston)    | Hydraulic Disc Brake (4-Piston)    | Hydraulic Disc Brake (4-Piston)    | Hydraulic Disc Brake (4-Piston)    |
| Front Suspension        | Single Side Upright Shock Absorber | Single Side Upright Shock Absorber | Single Side Upright Shock Absorber | Single Side Upright Shock Absorber |
| Rear Suspension         | 160L, Adjustable damping(FROZON)   | 160L, Adjustable damping(FROZON)   | 160L, Adjustable damping(FROZON)   | 160L, Adjustable damping(FROZON)   |
| Tire                    | 27.5*2.4 inch                      | 27.5*2.4 inch                      | 27.5*2.4 inch                      | 27.5*2.4 inch                      |
| Max gradient            | 25°                                | 25°                                | 25°                                | 25°                                |
| Max load                | 150kg                              | 150kg                              | 150kg                              | 150kg                              |
| Net weight/Gross weight | 40kg/50kg                          | 41.5kg/51.5kg                      | 43kg/53kg                          | 43kg/53kg                          |
| Product size            | 1907*720*1121mm                    | 1907*720*1121mm                    | 1907*720*1121mm                    | 1907*720*1121mm                    |
| Packing size            | 1650*340*830mm                     | 1650*340*830mm                     | 1650*340*830mm                     | 1650*340*830mm                     |



# PRODUCT SIZE

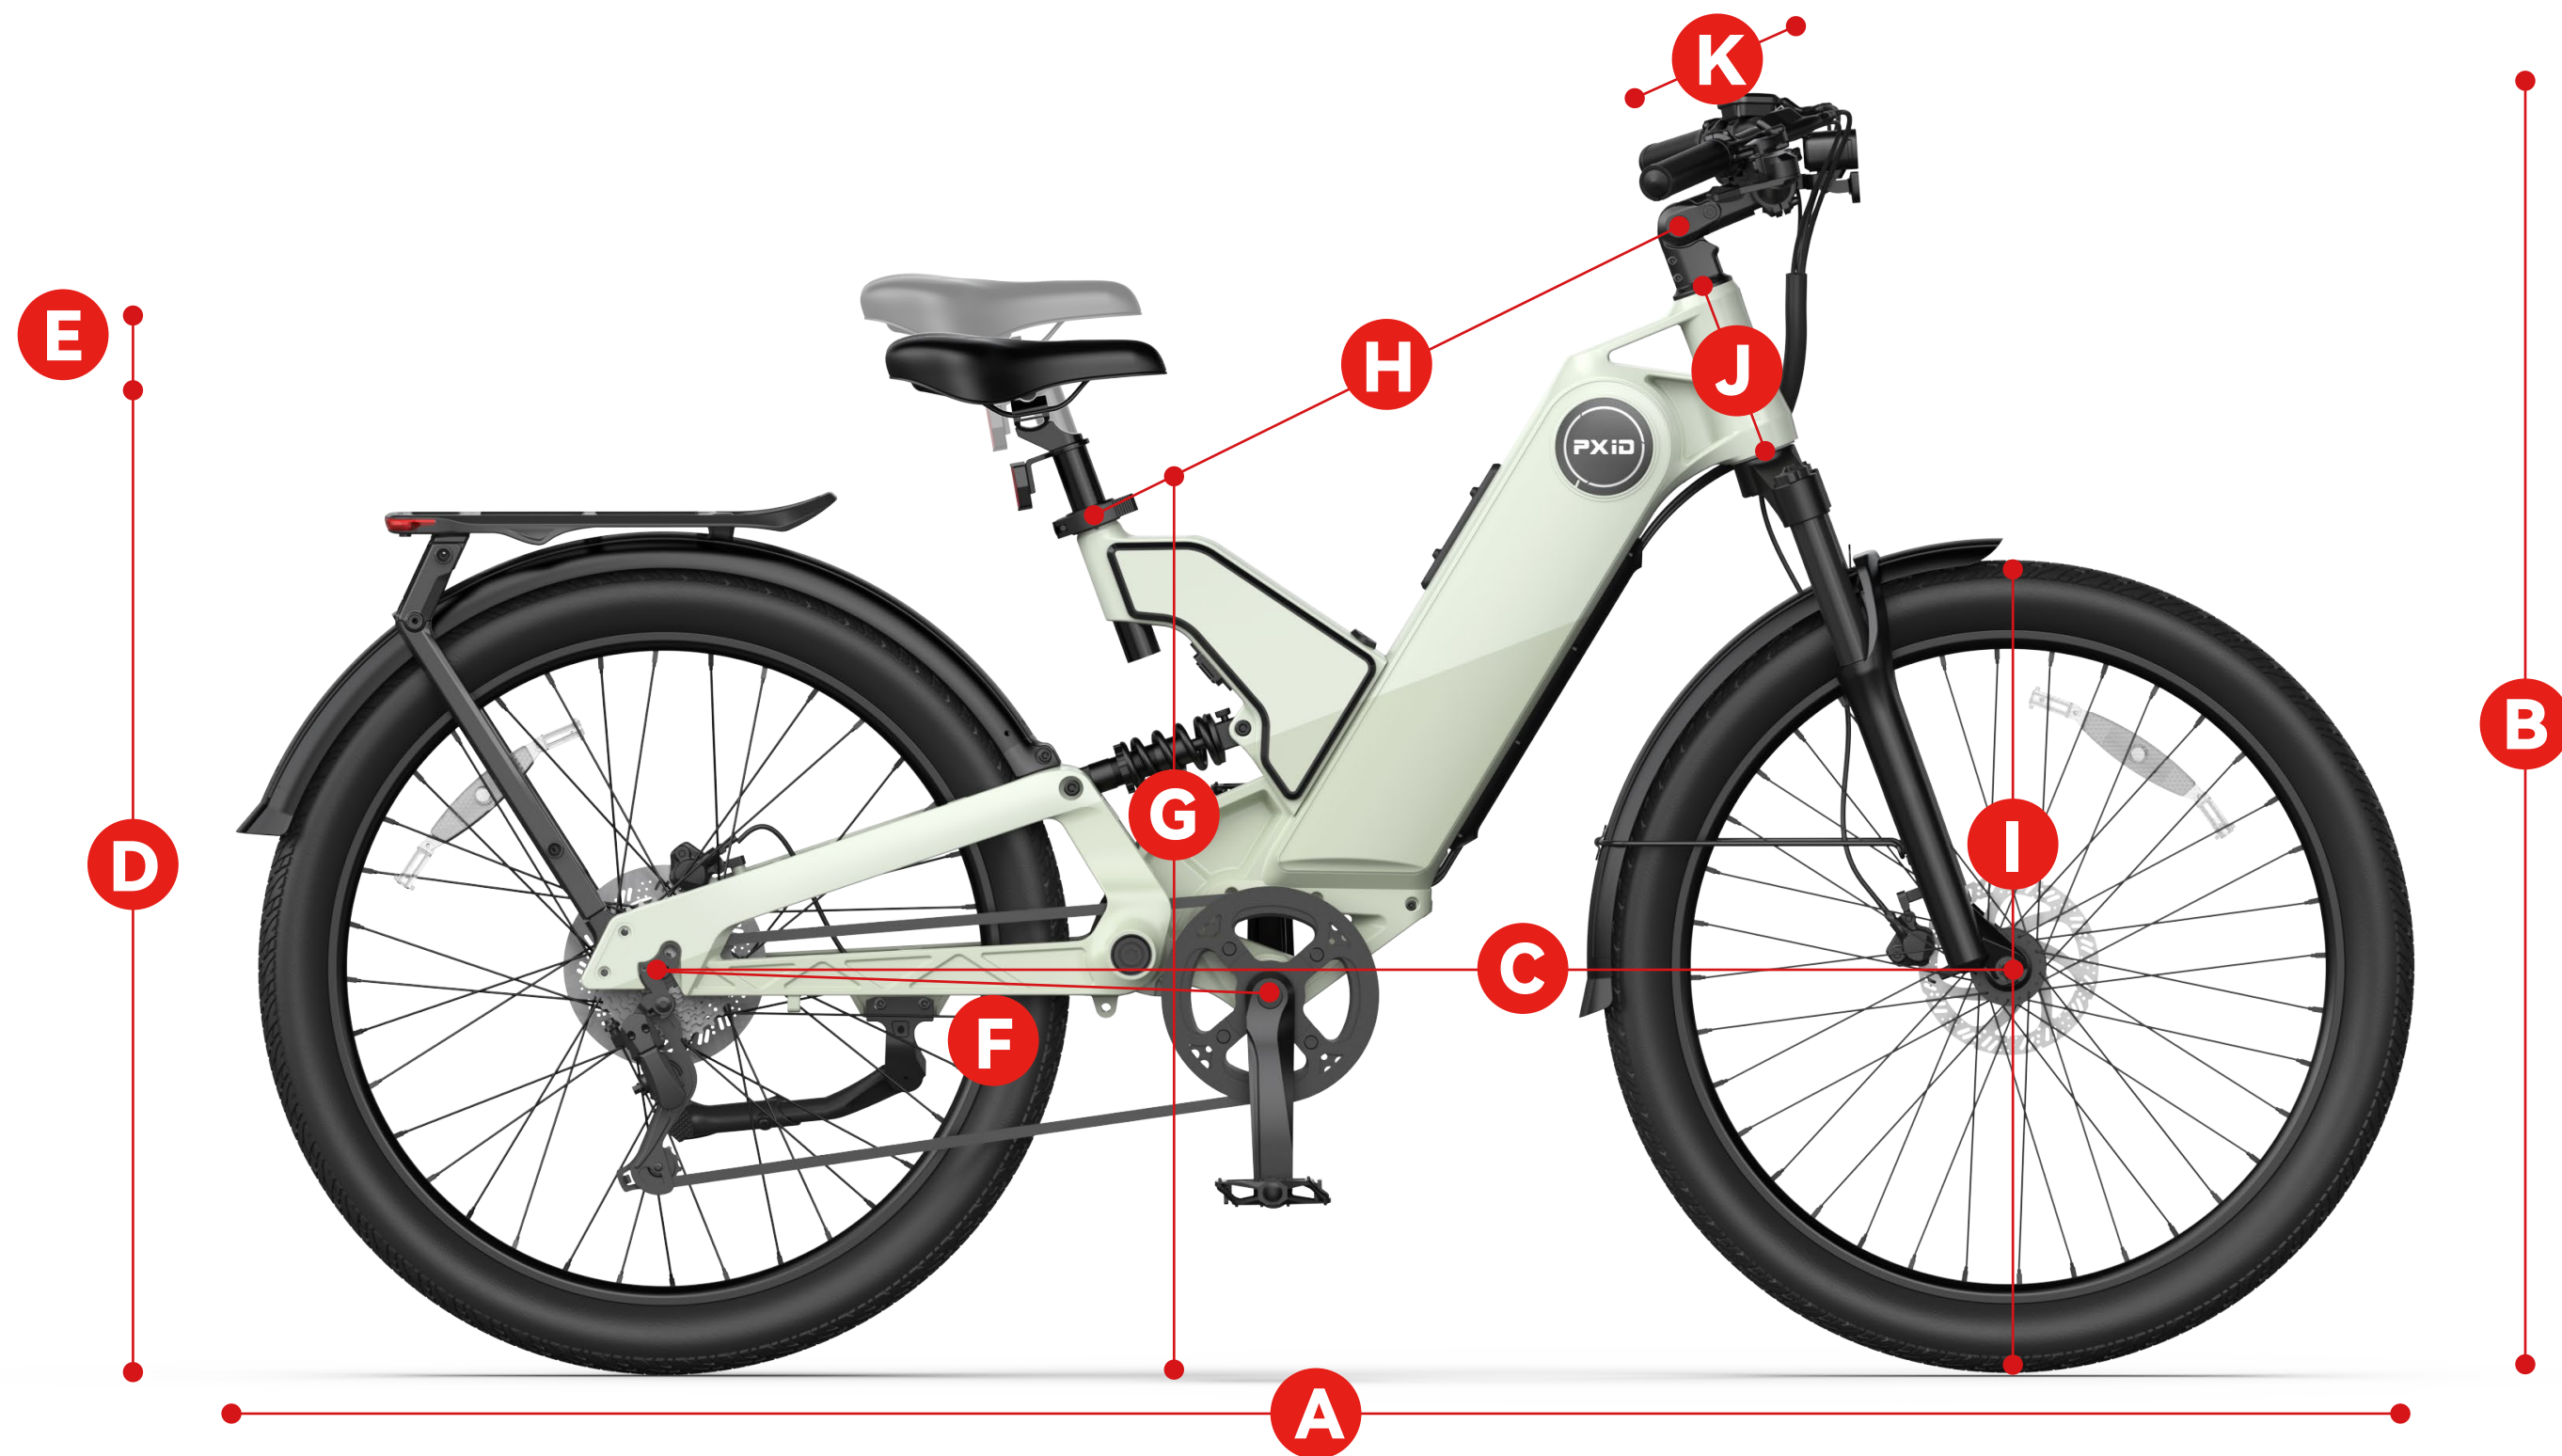

**A - Total Length 1907mm**

**B - Handlebar Height 1121mm**

**C - Wheelbase 1190mm**

**D - Minimum Seat Height 850mm**

**E - Maximum Seat Height 980mm**

**F - Chain Stay Length 537mm**

**G - Standover Height 780mm**

**H - Top Tube Length 540mm**


**I - Wheel Diameter 710mm**

**J - Head Tube Length 152mm**

**K - Handlebar Length 720mm**



# PACKING SIZE

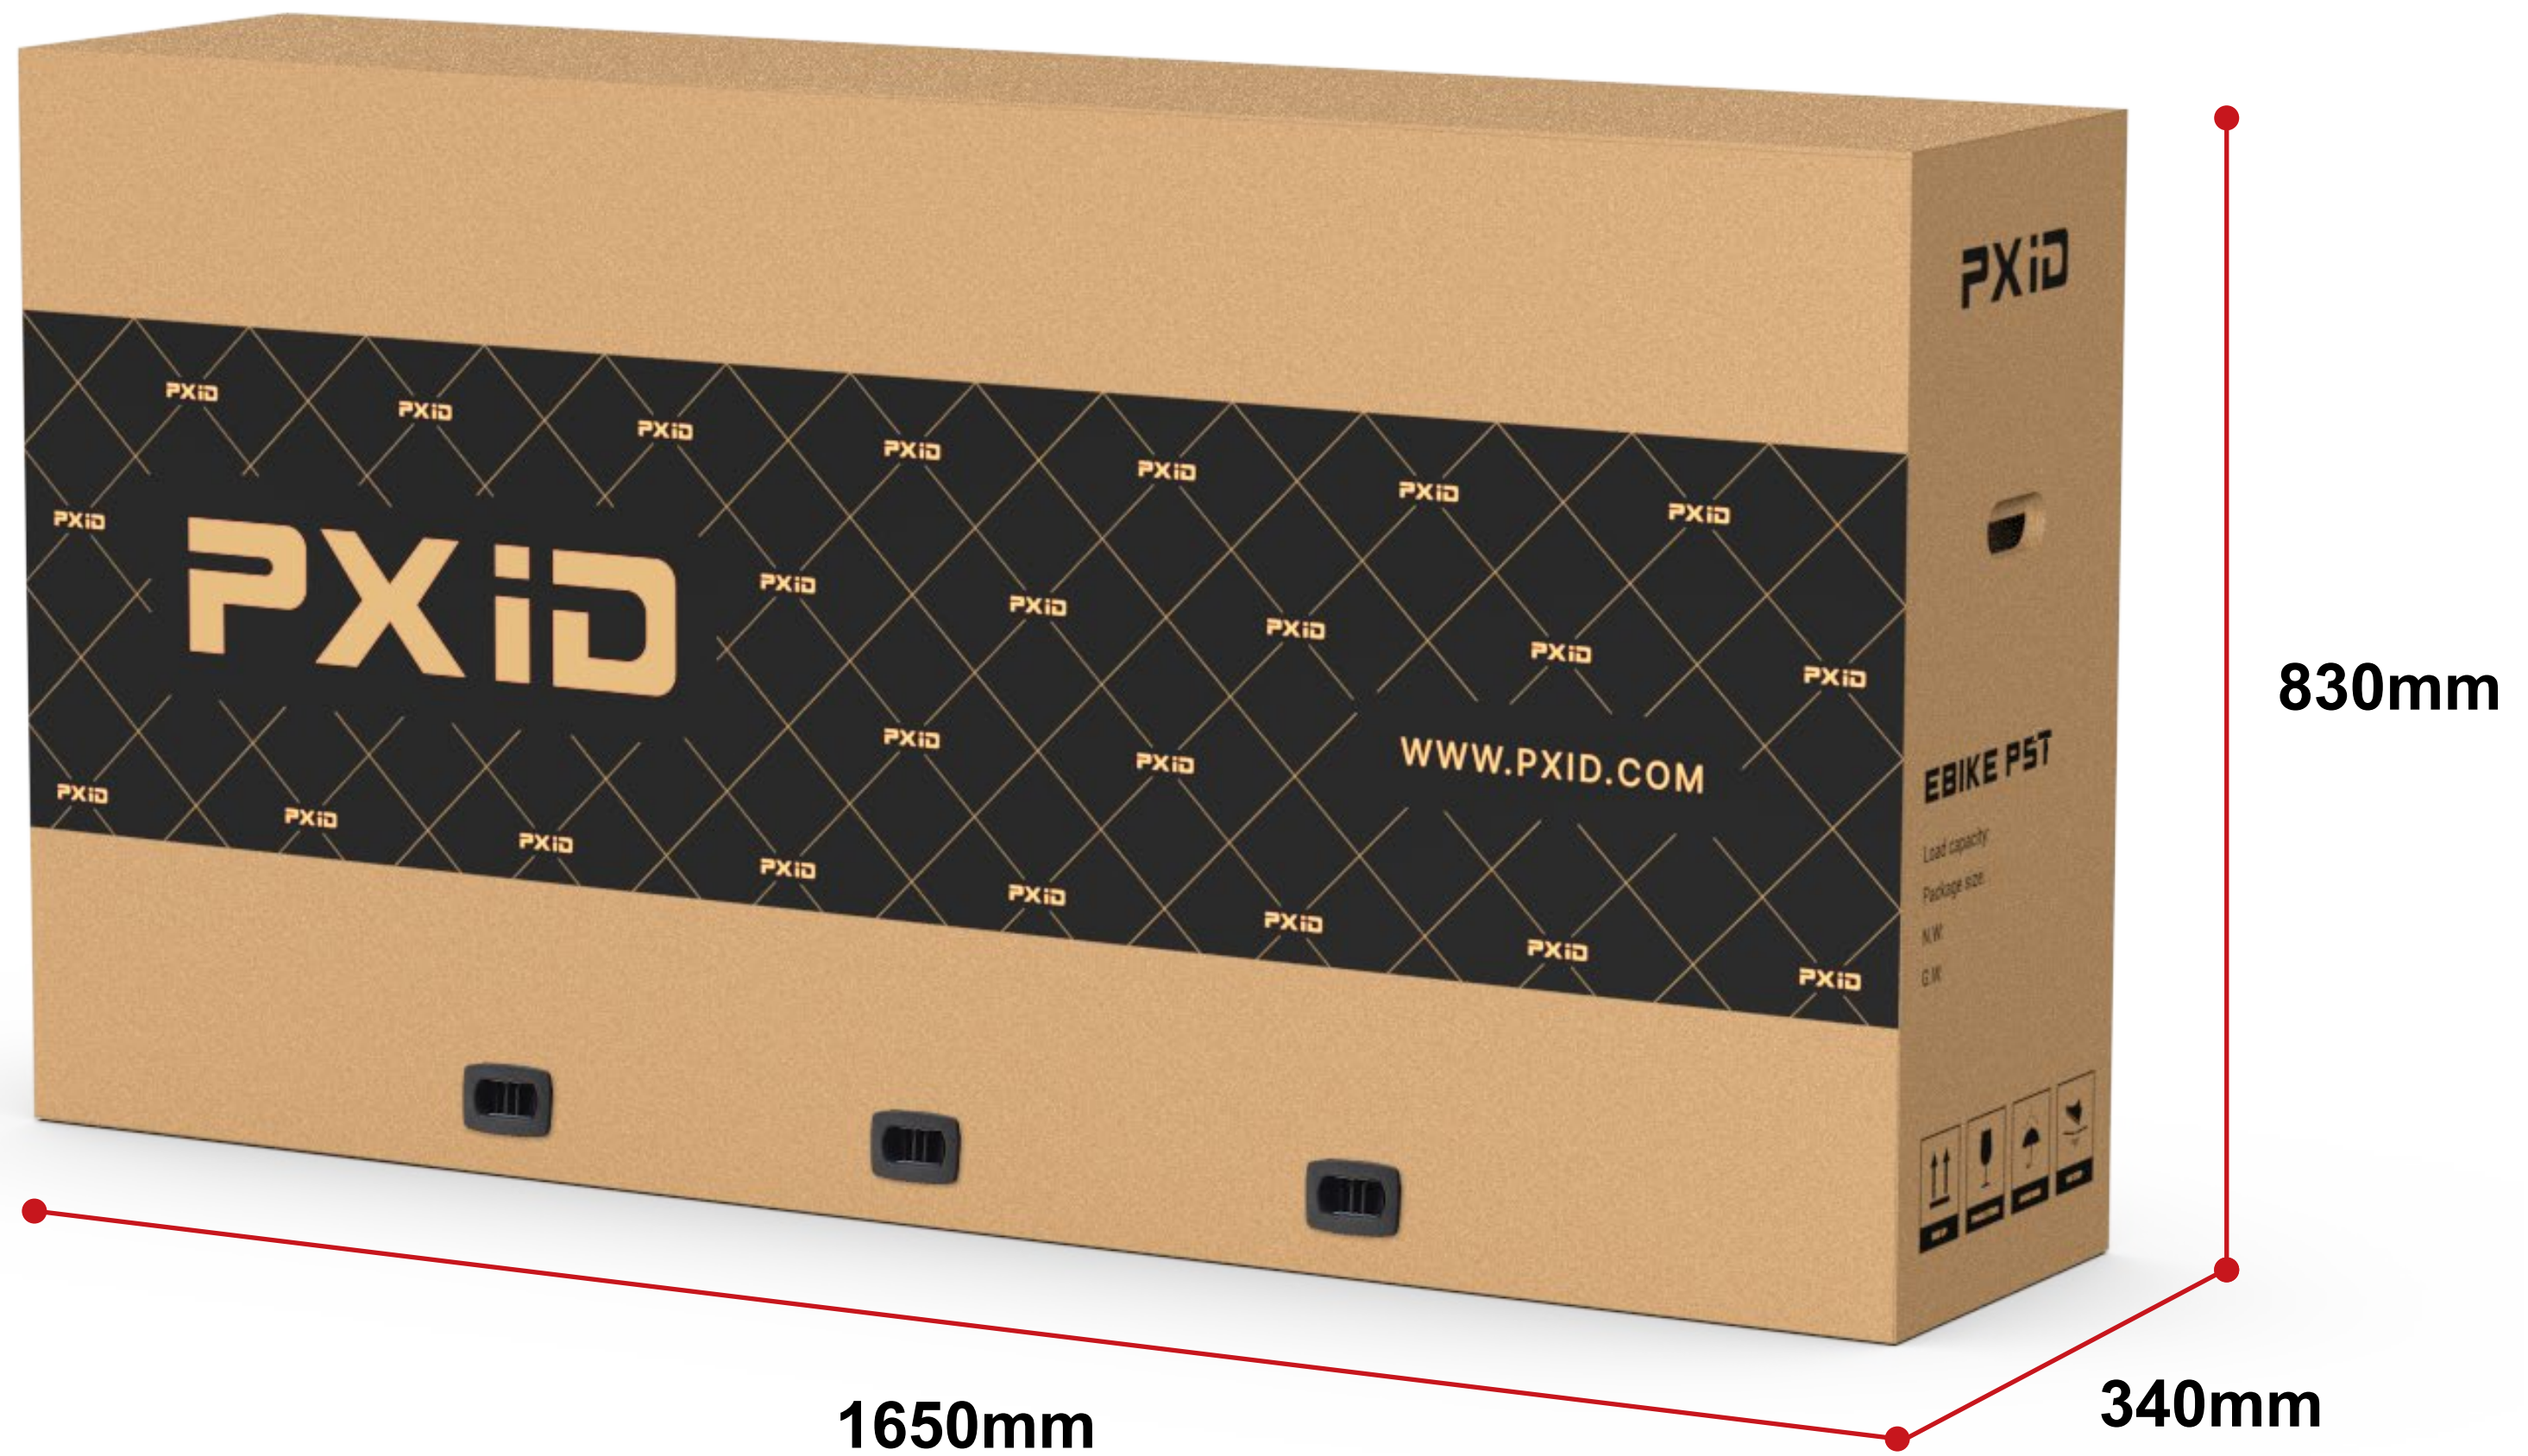

















החברה  
P5100  
HUMANITY INTELLIGENCE  
MANUFACTURING CO., LTD.  
Building 4, No. 18, Shimen  
East Road Economic Development  
Zone, Hefei, Anhui  
230000, China  
TEL: +86 551 6555 5555  
FAX: +86 551 6555 5555  
E-MAIL: hmi@hmi.com.cn

חברה  
HUMANITY INTELLIGENCE  
MANUFACTURING CO., LTD.  
Building 4, No. 18, Shimen  
East Road Economic Development  
Zone, Hefei, Anhui  
230000, China  
TEL: +86 551 6555 5555  
FAX: +86 551 6555 5555  
E-MAIL: hmi@hmi.com.cn

**Rechargeable Li-ion Battery pack**  
Model: EM-47-40V20Ah-FS  
Range: 47-50V 20Ah  
Charging voltage: 54.6V  
CAUTION:  
Do not expose to high temperature  
Do not use fire. Do not disassemble the  
battery pack. Do not use the battery pack  
without the original charger.  
Please refer to the user manual for more details.  
the internal cell is EVE 47-40V Li-ion battery  
SN: 115208189  
No warranty if label  
turns red











