





Up To 190km
RANGE (35Ah)



48km/h
MAX SPEED



150kg
PAYLOAD CAPACITY




1500W
MOTOR



Model	P6-A 		P6-B		P6-C	
Range		120km		120km / 190km		120km / 190km
Battery		48V 20Ah (SAMSUNG)		48V 20Ah / 35 Ah (SAMSUNG)		48V 20Ah / 35 Ah (SAMSUNG)
Speed		45km/h		48km/h		48km/h
Motor		750W 85N·m (DMHC)		1000W 100N·m (DMHC)		1500W 130N·m (DMHC)
Display		LCD CAN protocol (BIGSTONE)		LCD CAN protocol (BIGSTONE)		LCD CAN protocol (BIGSTONE)
Sensor		Torque sensor (DMHC)		Torque sensor (DMHC)		Torque sensor (DMHC)
Front Shock		Inverted fork suspension aluminum shaft+Coil+Lockout Shoulder upside down (EXHO)		Inverted fork suspension aluminum shaft+Coil+Lockout Shoulder upside down (EXHO)		Inverted fork suspension aluminum shaft+Coil+Lockout Shoulder upside down (KKE)
Rear Shock		200L, 1200Lbs 30mm travel Adjustable damping (FROZON)		200L, 1200Lbs 30mm travel Adjustable damping (FROZON)		200L, 1200Lbs 30mm travel Adjustable damping (KKE)
Net weight	42kg		42.4kg / 45kg		45.4kg / 48kg	
Gross Weight	52kg		52.4kg / 55kg		55.4kg / 58kg	
Size		175*72*107cm		Packing Size		154*35*82.5cm
40HQ	144		20GP		58	

PRODUCT SIZE

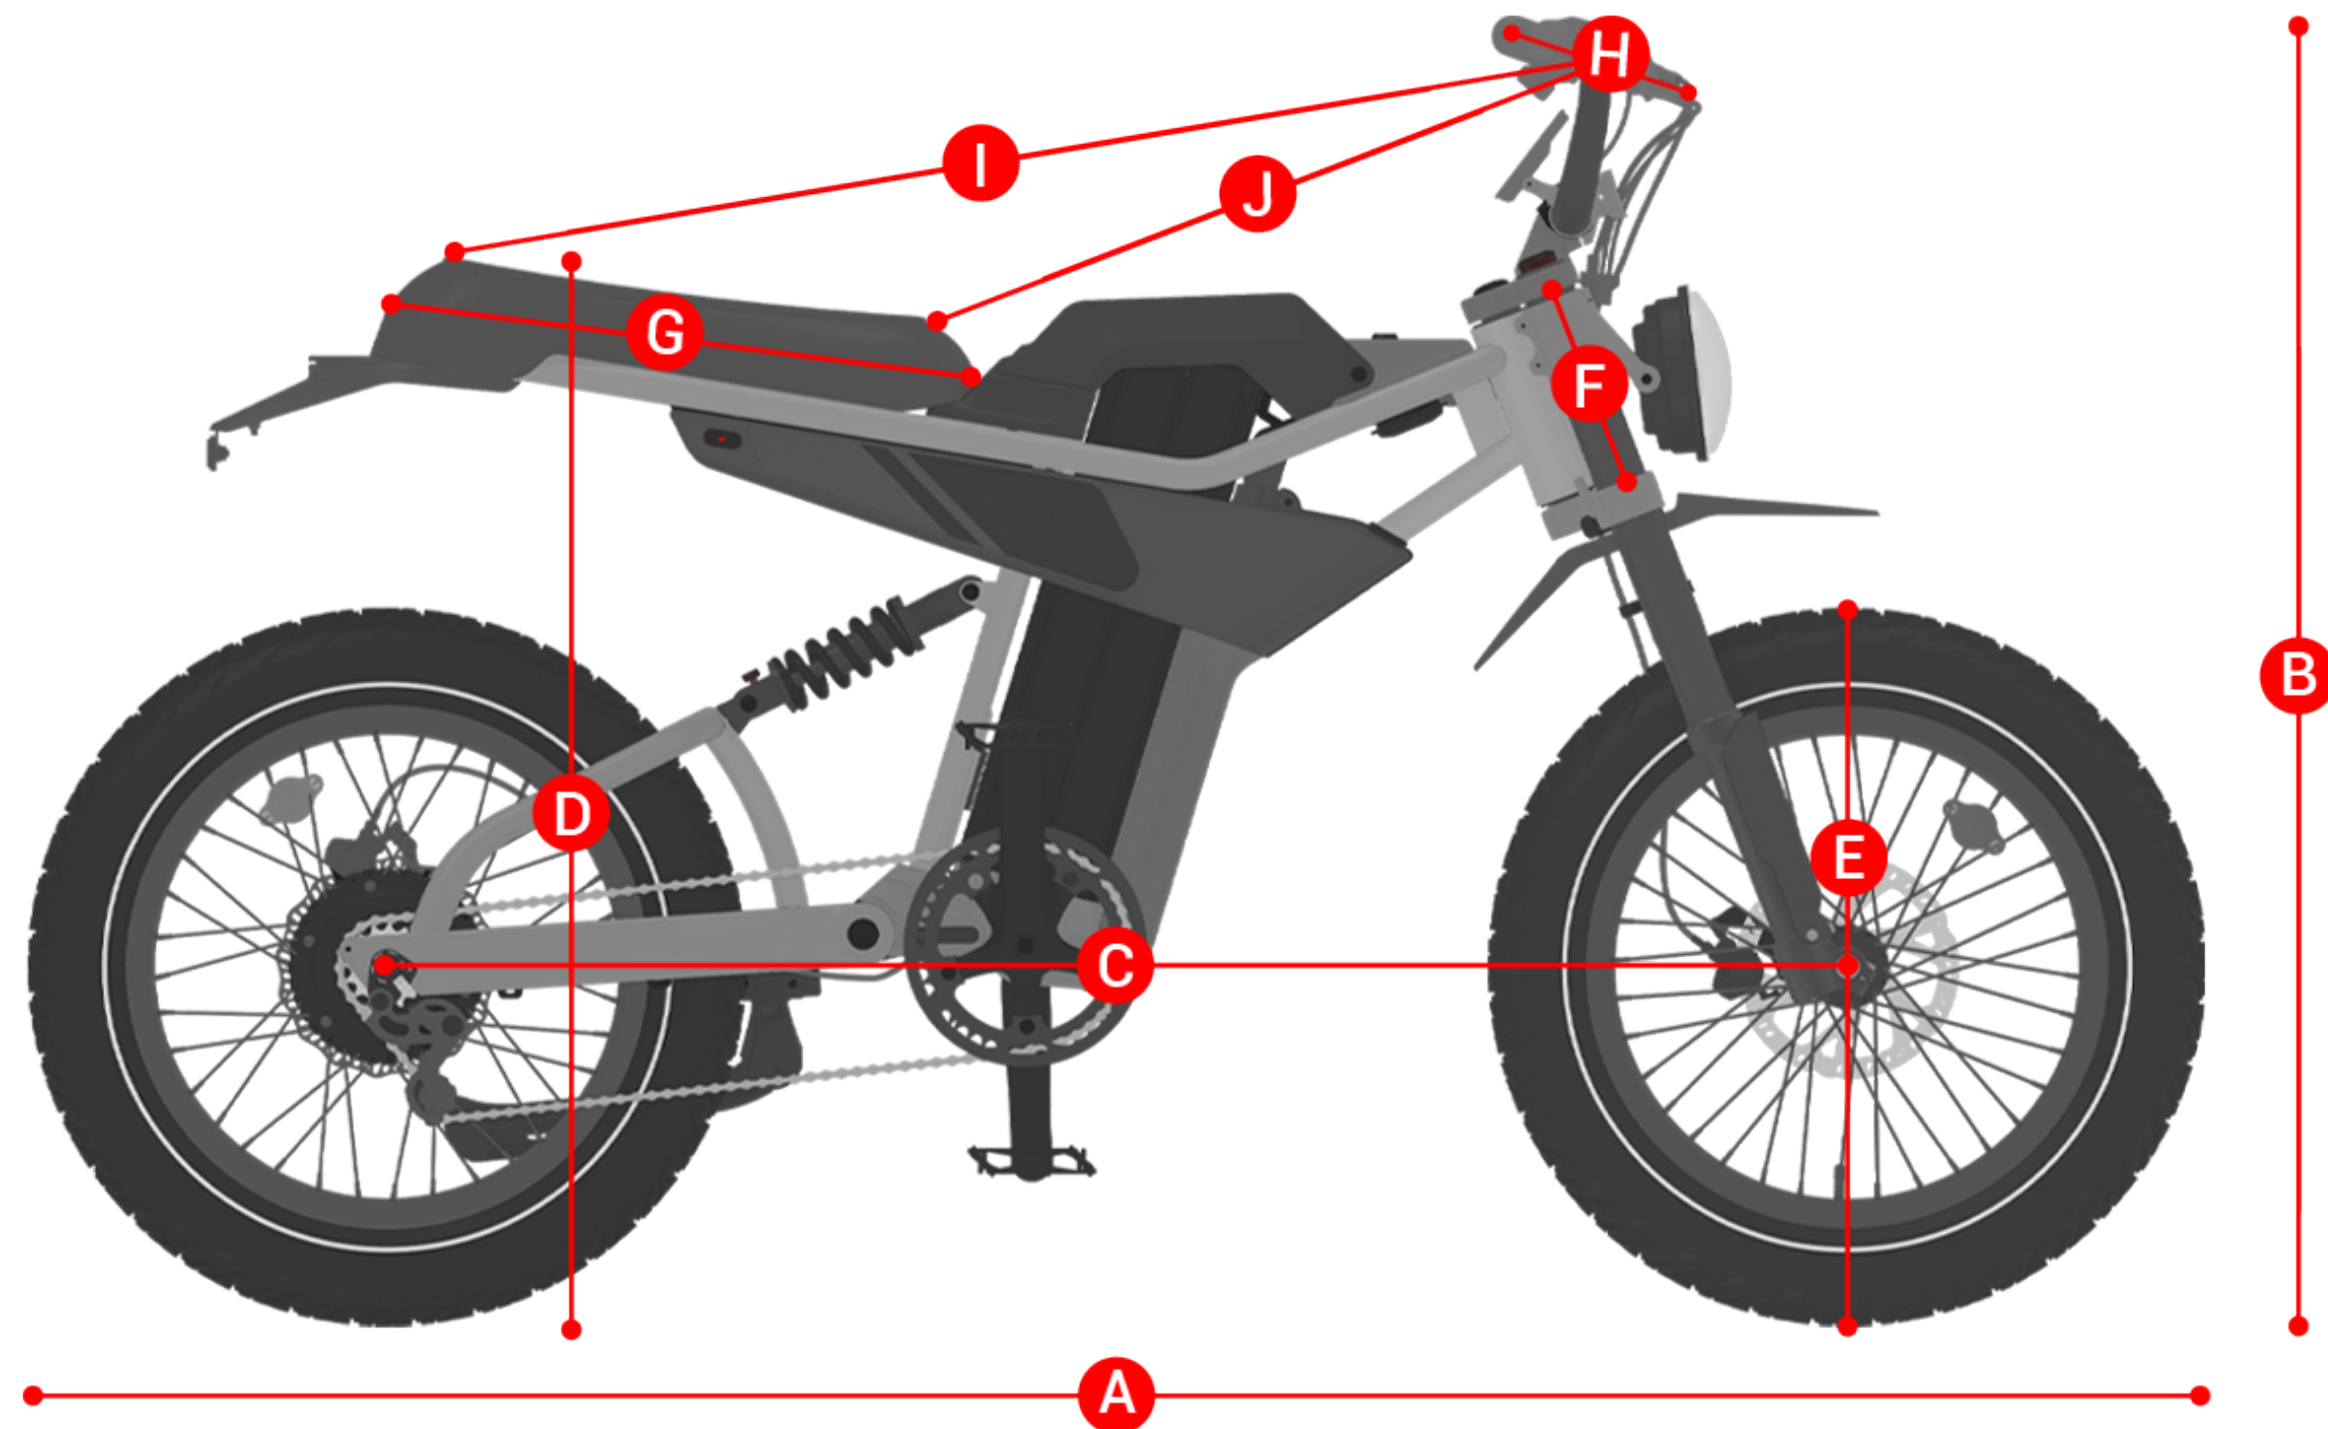

A - Total Length 1750mm

B - Handlebar Height 1070mm

C - Wheelbase 1170mm

D - Seat Height 820mm

E - Wheel Diameter 580mm

F - Head Tube Length 150mm


G - Saddle 485*155*105mm

H - Handlebar Length 720mm

I - Saddle to handlebar 970mm

J - Saddle to handlebar 510mm

PACKING SIZE

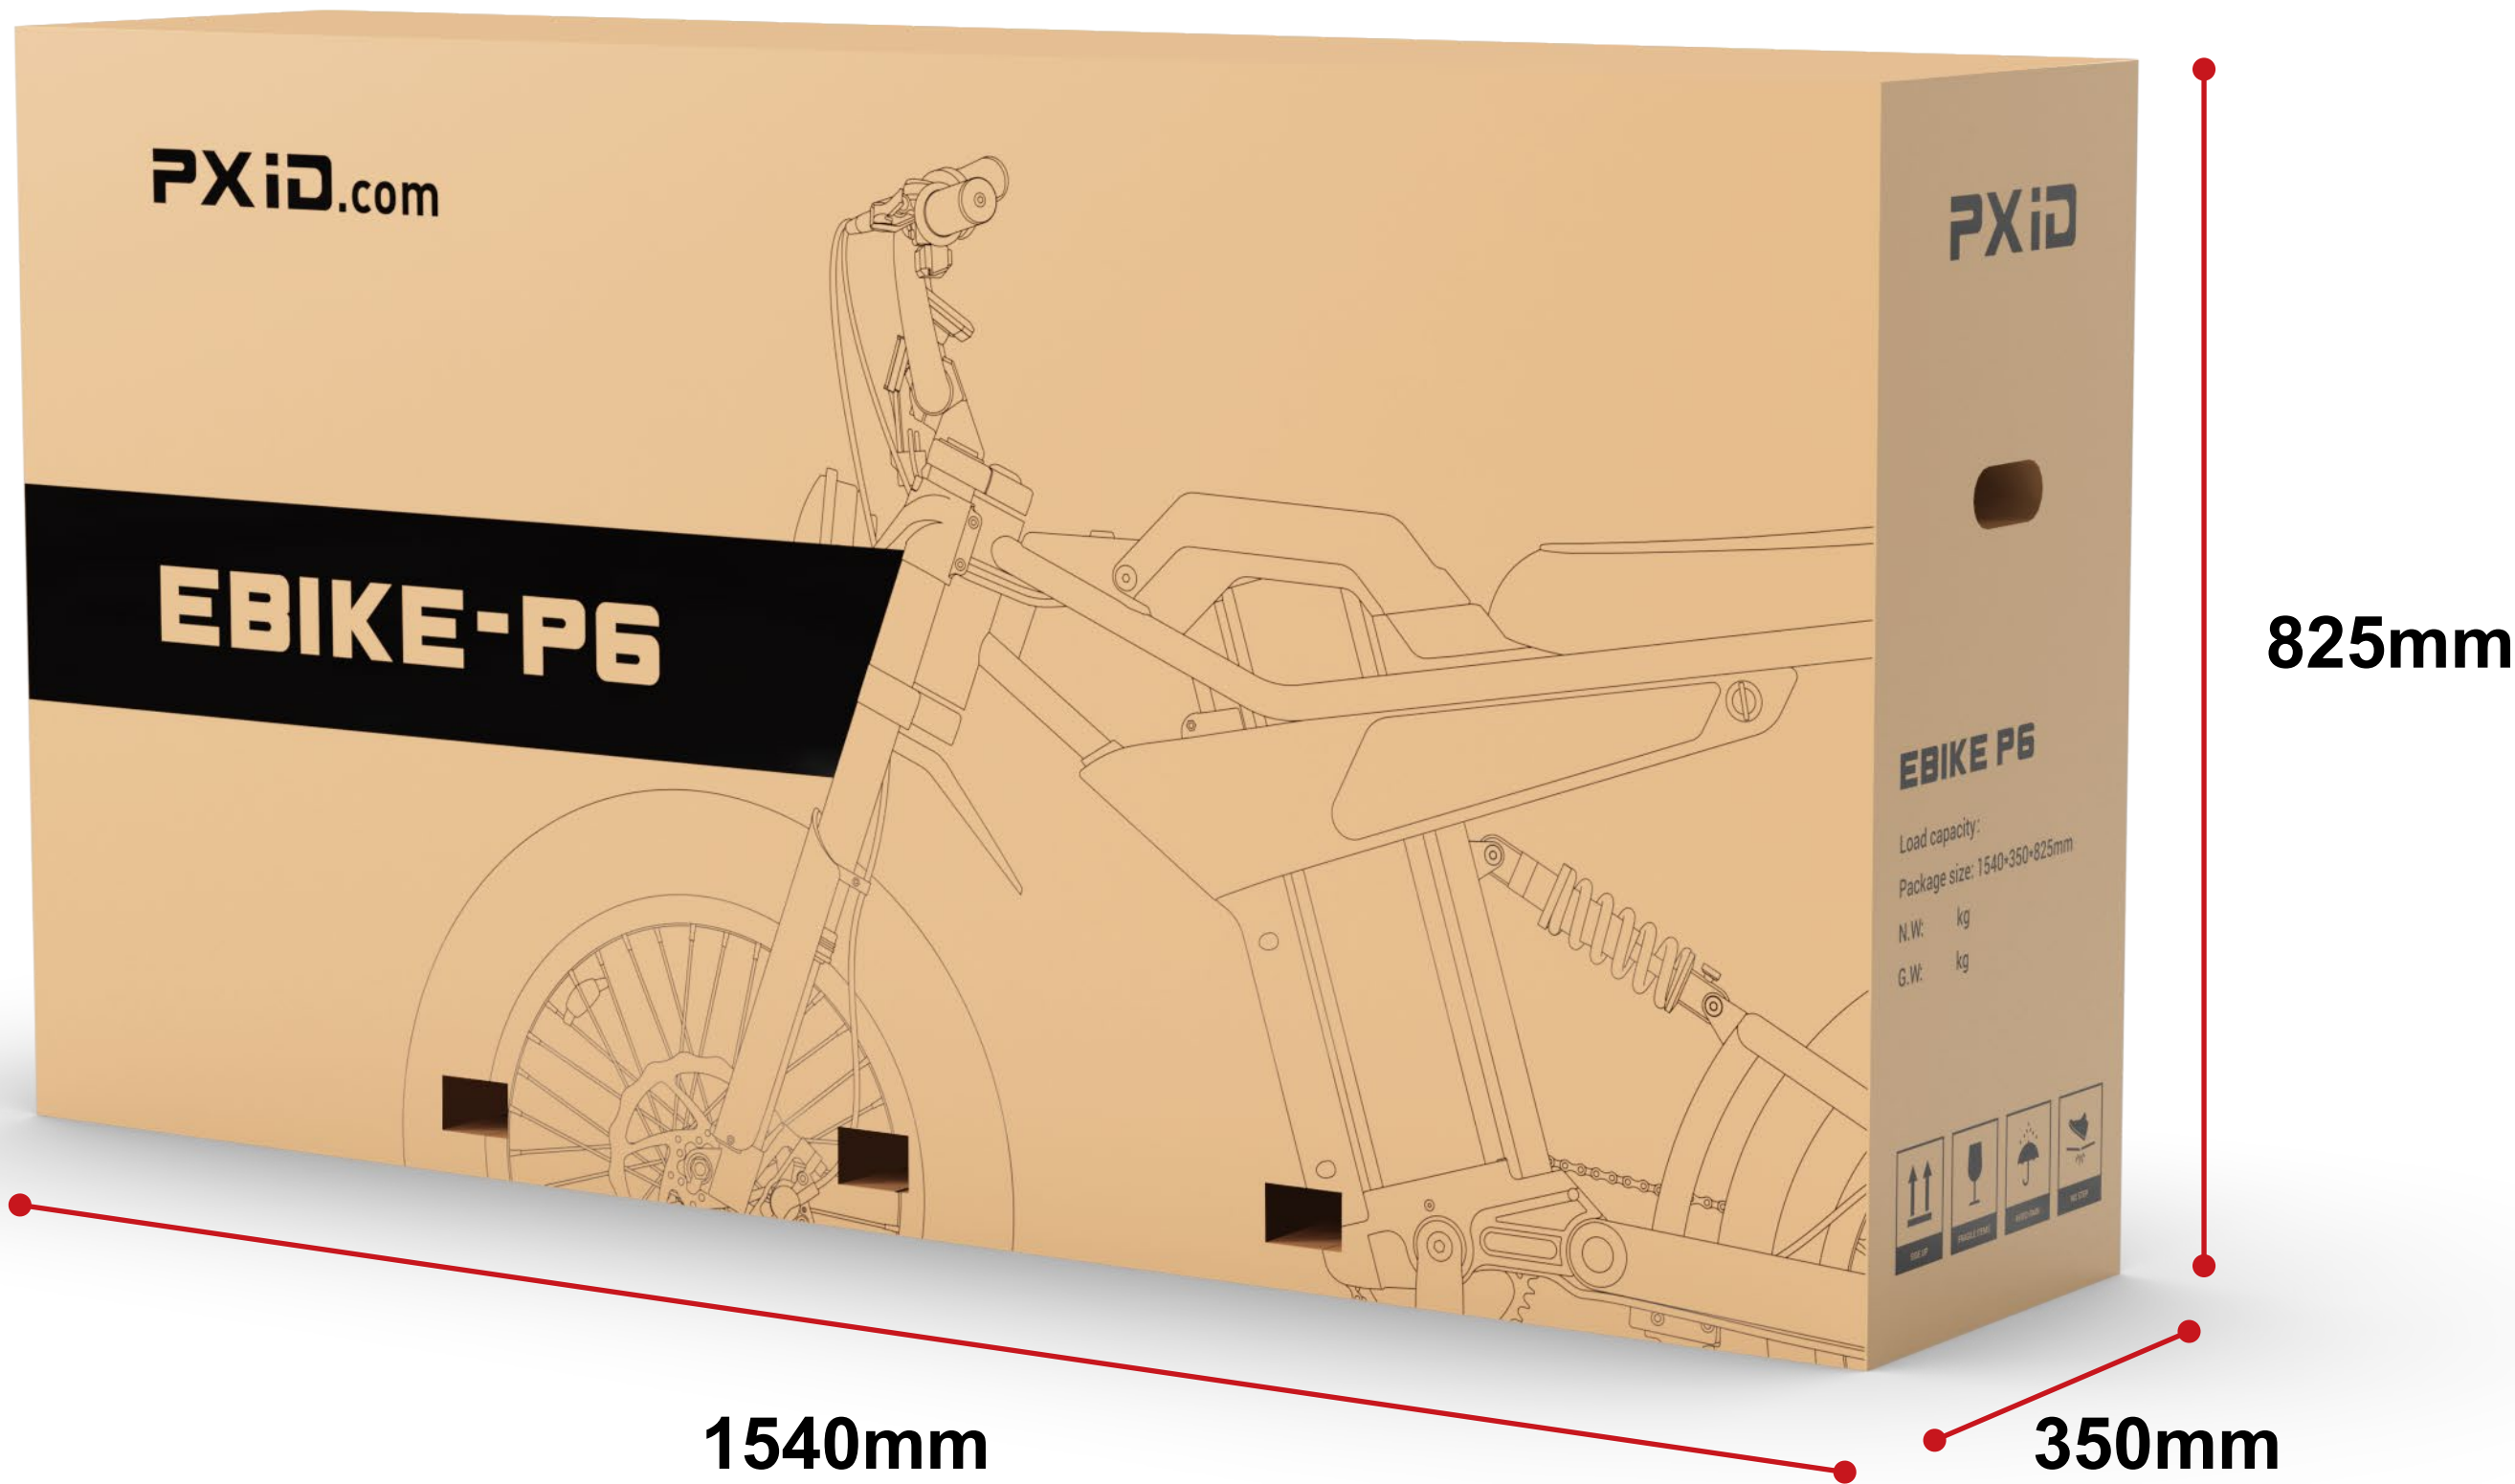













PXid



PXiD





